

## Model No. AMC 2 W/R/G/3700

### Product Image



### Features

**Constant current drive for Constant Luminosity**

**3chip SMD LED mounted / CE, UL Approved**

Reverse voltage, current protection

Double-sided PCB design to maximize heat release

120° Viewing angle creates better silhouettes with even light distribution

Durable epoxy resin fill for waterproof rating with IP68


12V DC operation requires a constant voltage Power supply (Sold separately)

### Product dimension and connections

Case Dimension : 38L x 12W x 7H mm, Weight: 7g per module

LED Pitch : 25mm, Wire length : 80mm, Center to Center: 118mm

**Maximum run in series : 50 modules**

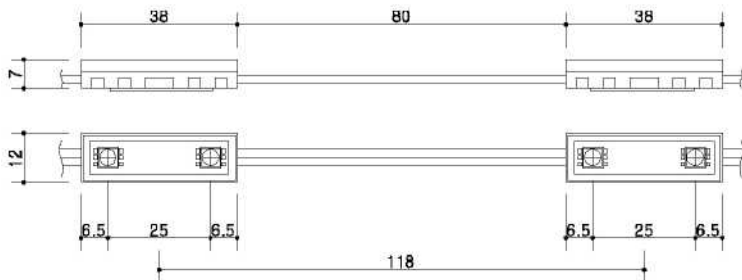

### Product dimension and connections

Product No.	[AMC 2 W/R/G/B/3700]				
Col	W 8500	R	G	B	W 3700
Operating Power	DC 12V				
Power / Current Dissipation	0.48 W, 40mA				
LED Spec	120° Viewing angle, 50,000hr rated life, made in Korea				
Luminous intensity(mcd)	11,000	4,200	7,200	1,600	
Luminous intensity(lm)	31.2	11.9	20.3	4.5	25
Dominant Wavelength	-	625	525	460	-
Standard Color Temperature	8500	-	-	-	3700
Module connection & Cuttability	Wire to Wire Series connection, every module				
Recommended Channel Height	Min. 80mm				
Operating Temperature	-20°C~ 60°C				
Storage Temperature	-30°C~ 70°C				
Waterproofing rate	IP68				
Cable	awg18, 1007-SPT-1(105°C)				
Case Materials	ABS housing + Ductile Epoxy Treatment				

### Contact:

AMC System tel. +48 122830840 fax: +48 122854484

[www.amcsystem.pl](http://www.amcsystem.pl) e-mail: [led@amcsystem.pl](mailto:led@amcsystem.pl)