


PANORAMA MINI



Dimensions:

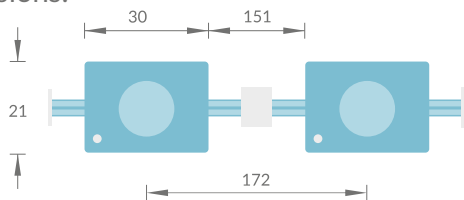

Connection diagram:



The maximum number of modules connected in a single chain is 20 pcs(12V) or 50 pcs(24V). In case of use of the larger number of modules, please connect them to power supply by separate cables (parallel connection of chains).

| Parameters | PANORAMA MINI |
|-----------------------|---|
| Power/current | 1W/83mA -12V; 1W/42mA - 24V, 0.6W/50mA |
| Voltage | 12V/24V |
| Luminous flux | 1W - 90 lm, 0.6W - 87 lm |
| Lighting efficiency | 1W - 90 lm/W, 0.6W - 145 lm/W |
| Beam angle | 175° |
| Color temperature | 3000K, 4000K, 5000K, 6500K, 7000K(0.6W,1W), 8000K |
| Working temperature | -30° C ~ 50° C |
| Dimensions | 30x21x7 mm |
| C2C distance | 172 mm |
| Chip type | 2835 |
| IP protection | IP 65 |
| Durability | 50 000 h |
| Max in one chain(pcs) | 20 (12V, 24V CV) ; 50 (24V) |
| Warranty(years) | 5 |